LUMiRETRO

5 YEARS WARRANTY

PRODUCT DATA SHEET

LED T5 Tubes
5ft

Options

Part Number	Description
NET-55-01-11	Standard 5500K
NET-55-01-12	Standard 4000K

Features

- Rotatable end caps
- Single colour temperature 5500K or 4000K
- Ballast-bypass to reduce flickering or overheating
- Optional Emergency Kits available

Key Data

Power	14W
Lumens	1960lm
Colour Temperature	5500K or 4000K
IP Rating	IP20
Dimensions	1463.2 x 22mm

Technical Specifications

Input Voltage	85-265V
Power Factor	>0.95
Luminaire Efficacy	130lm/W
LED Type	SMD 2835
LED Manufacturer	Sanan
Total Circuit Power	14W
Electrical Class	2
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	No
Flicker-Free	Yes
Operating Temperature	-15°C to +45°C
Lifespan LM80	50,000 Hours
UGR Rating	22
Driver Output Voltage	50-80V
Housing Colour	White
Housing Material	Aluminium
Diffuser Material	Polycarbonate
Manufacturer	Wiscoon

Units 18 & 19, Enterprise Business Park, Yaxley, PE7 3WY
01223 948707 | sales@lumiretro.co.uk
www.lumiretro.co.uk

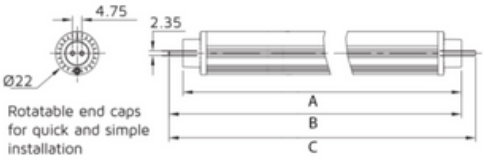

All dimensions are in mm	A	B	C
NET-55-01-03	288	295	302
NET-55-01-05	549	556	563
NET-55-01-07	849	856	863
NET-55-01-08	849	856	863
NET-55-01-09	1149	1156	1163
NET-55-01-11	1449	1456	1463
NET-55-01-10	1149	1156	1163
NET-55-01-12	1449	1456	1463

All measurements are in mm

Compatible Accessories

Part Number	Description
Emergency Kits	
NET-50-33-01	Streamer 3H 2.5W Emergency Kit
NET-61-33-05	Foxlux DALI 3W Emergency Kit
Misc.	
NET-55-16-02	Replacement Starter

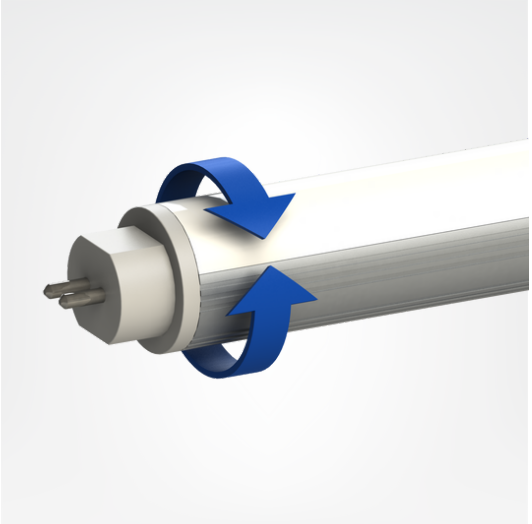

Related Products

Part Number	Description
NET-55-01-03	1ft T5 Tube 5500K
NET-55-01-05	2ft T5 Tube 5500K
NET-55-01-07	3ft T5 Tube 5500K
NET-55-01-08	3ft T5 Tube 4000K
NET-55-01-09	4ft T5 Tube 5500K
NET-55-01-10	4ft T5 Tube 4000K

Areas of Application

Commercial Spaces



Underground Car Parks

Workshops



Community Spaces

Units 18 & 19, Enterprise Business Park, Yaxley, PE7 3WY
01223 948707 | sales@lumiretro.co.uk
www.lumiretro.co.uk

LUMiRETRO

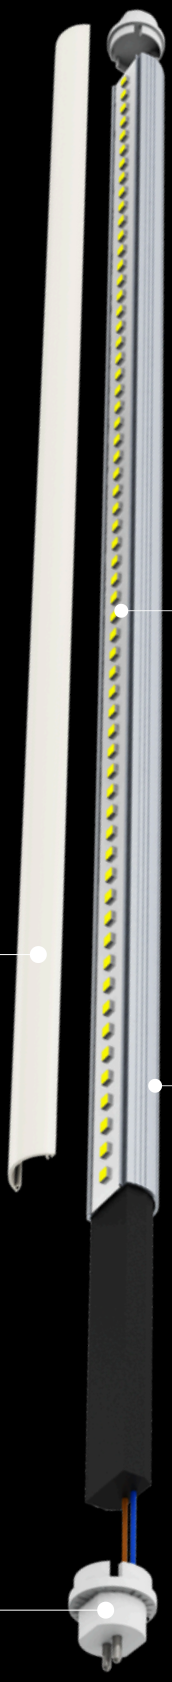

Units 18 & 19, Enterprise Business Park, Yaxley, PE7 3WY
01223 948707 | sales@lumiretro.co.uk
www.lumiretro.co.uk