LUMiRETRO

PRODUCT DATA SHEET

LED 4000K Retrofit Gear Tray

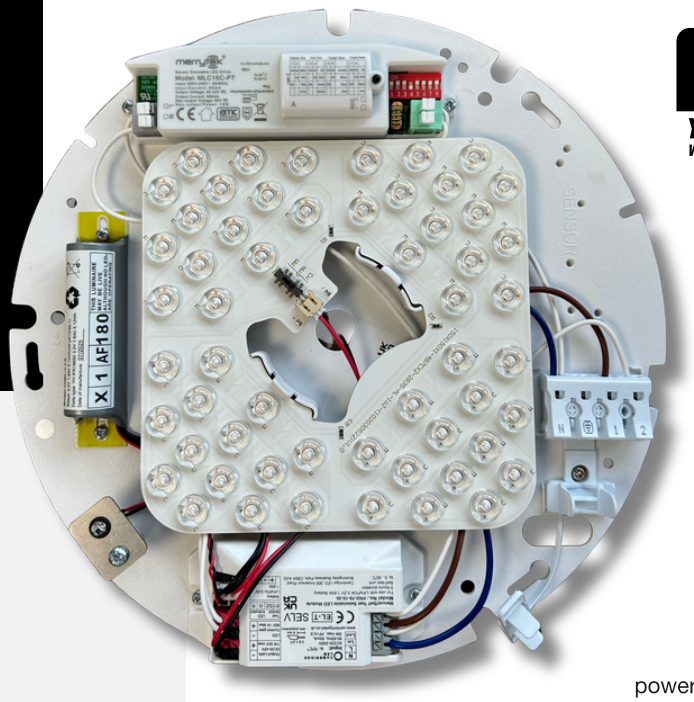

5 YEARS WARRANTY

powered by TRIDONIC

Options

Part Number	Description
NET-33-06-40	Standard
NET-33-06-42	Emergency/Self Test
NET-33-06-44	Microwave Sensor
NET-33-06-46	Microwave Sensor Emergency/Self Test

Features

- Choose between 12W, 14W, 16W or 18W at install
- Single colour temperature 4000K
- Multiple mounting points
- Push connectors
- Quick release function

Key Data

Power	12W/14W/16W/18W
Lumens	1200lm/1400lm/1600lm/1800lm
Colour Temperature	4000K
Dimensions	Ø261 x 23.6mm

Technical Specifications

Input Voltage	220-240V	
Power Factor	0.9	
Luminaire Efficacy	100lm/W	
LED Manufacturer	Jingrui	
LED Type	SMD 2835	
Total Circuit Power	12W/14W/16W/18W	
Electrical Class	1	
Colour Rendering	>80 CRI	
Lamp Viewing Angle	115°	
Dimmable	No	
Operating Temperature	0°C to +45°C	
Lifespan LM80	35,000 Hours	
UGR Rating	More than 19	
Driver Output Voltage	36-42V	
Hours Maintained	3	
Battery Pack	Li-on 3.7V	
Battery Warranty	2 Years	
Charge Time	24 Hours	
Emergency Kit	Streamer	
Emergency Operation	3 Hours	
Standby Dimming Level	0%/10%	
Hold Time	5sec-10min	
Corridor Function	Yes	
Detection Range	2-10m	
Manufacturer	LumiRetro	

Emergency only Microwave Sensor only

Units 18 & 19, Enterprise Business Park, Yaxley, PE7 3WY
01223 948707 | sales@lumiretro.co.uk
www.lumiretro.co.uk

LUMiRETRO

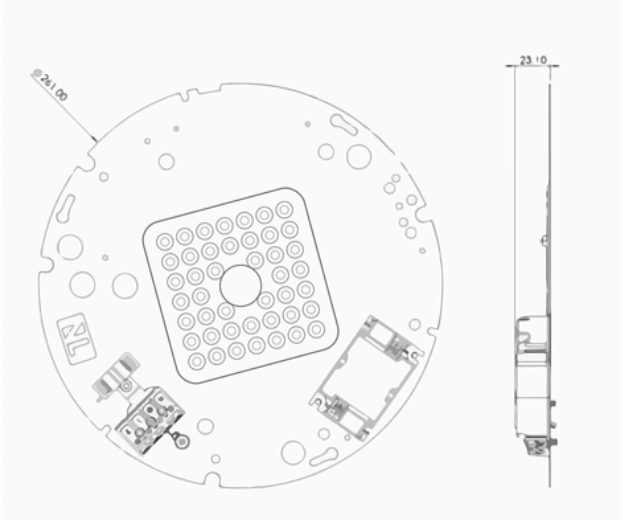

All measurements are in mm

Related Products

Part Number	Description
NET-33-06-12	Tri-Colour Standard

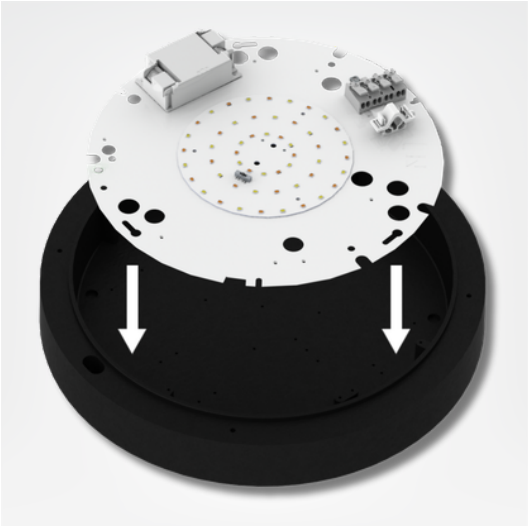

Areas of Application

Schools

Stairwells and Corridors

Units 18 & 19, Enterprise Business Park, Yaxley, PE7 3WY
01223 948707 | sales@lumiretro.co.uk
www.lumiretro.co.uk

LUMiRETRO

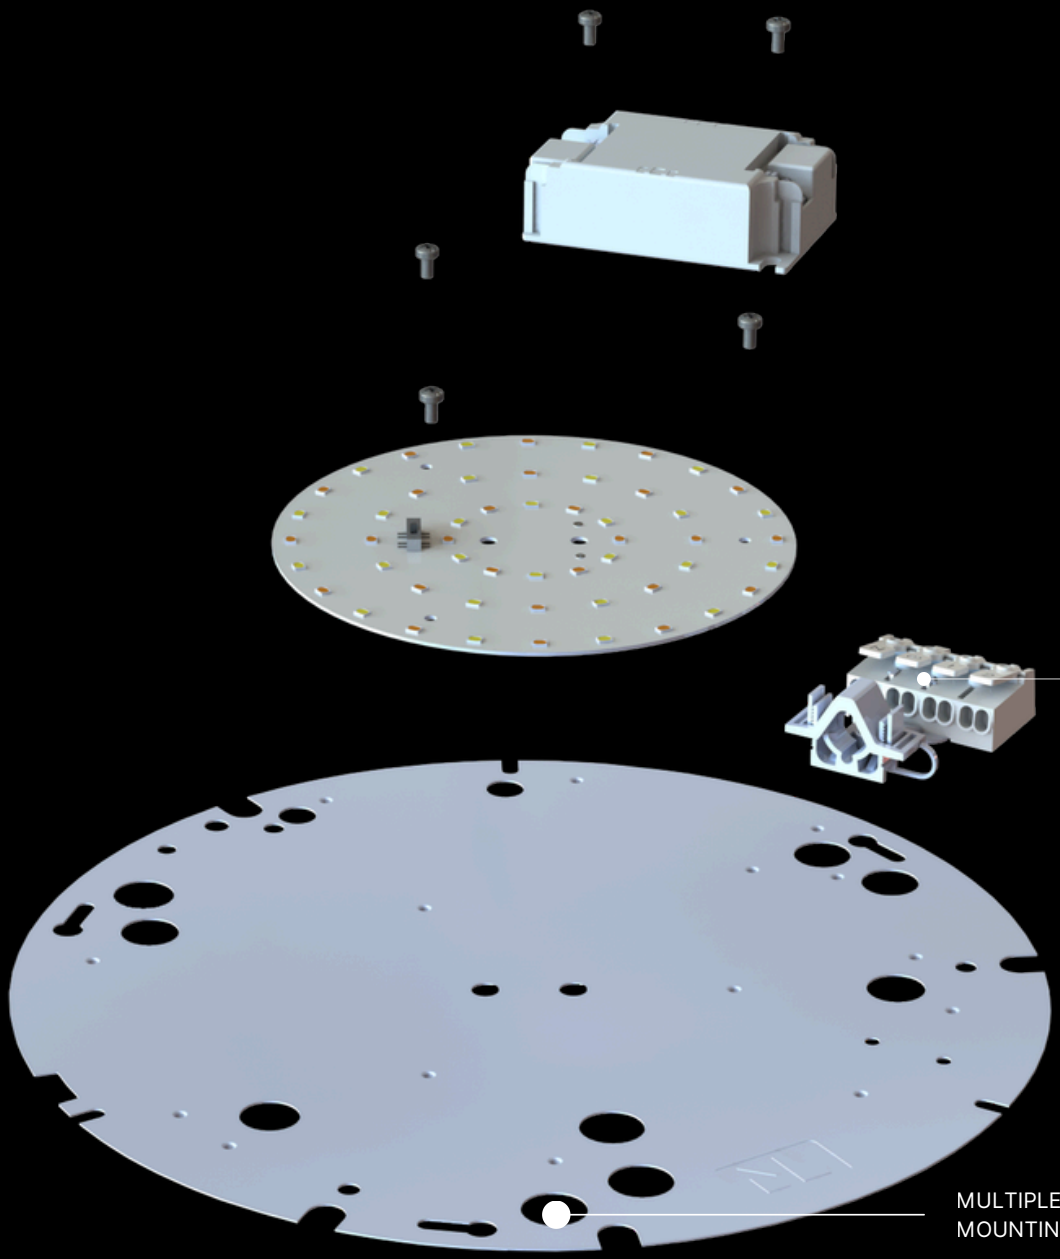

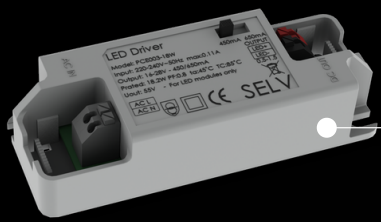

POWER SELECTABLE
TRIDONIC DRIVER

Units 18 & 19, Enterprise Business Park, Yaxley, PE7 3WY
01223 948707 | sales@lumiretro.co.uk
www.lumiretro.co.uk